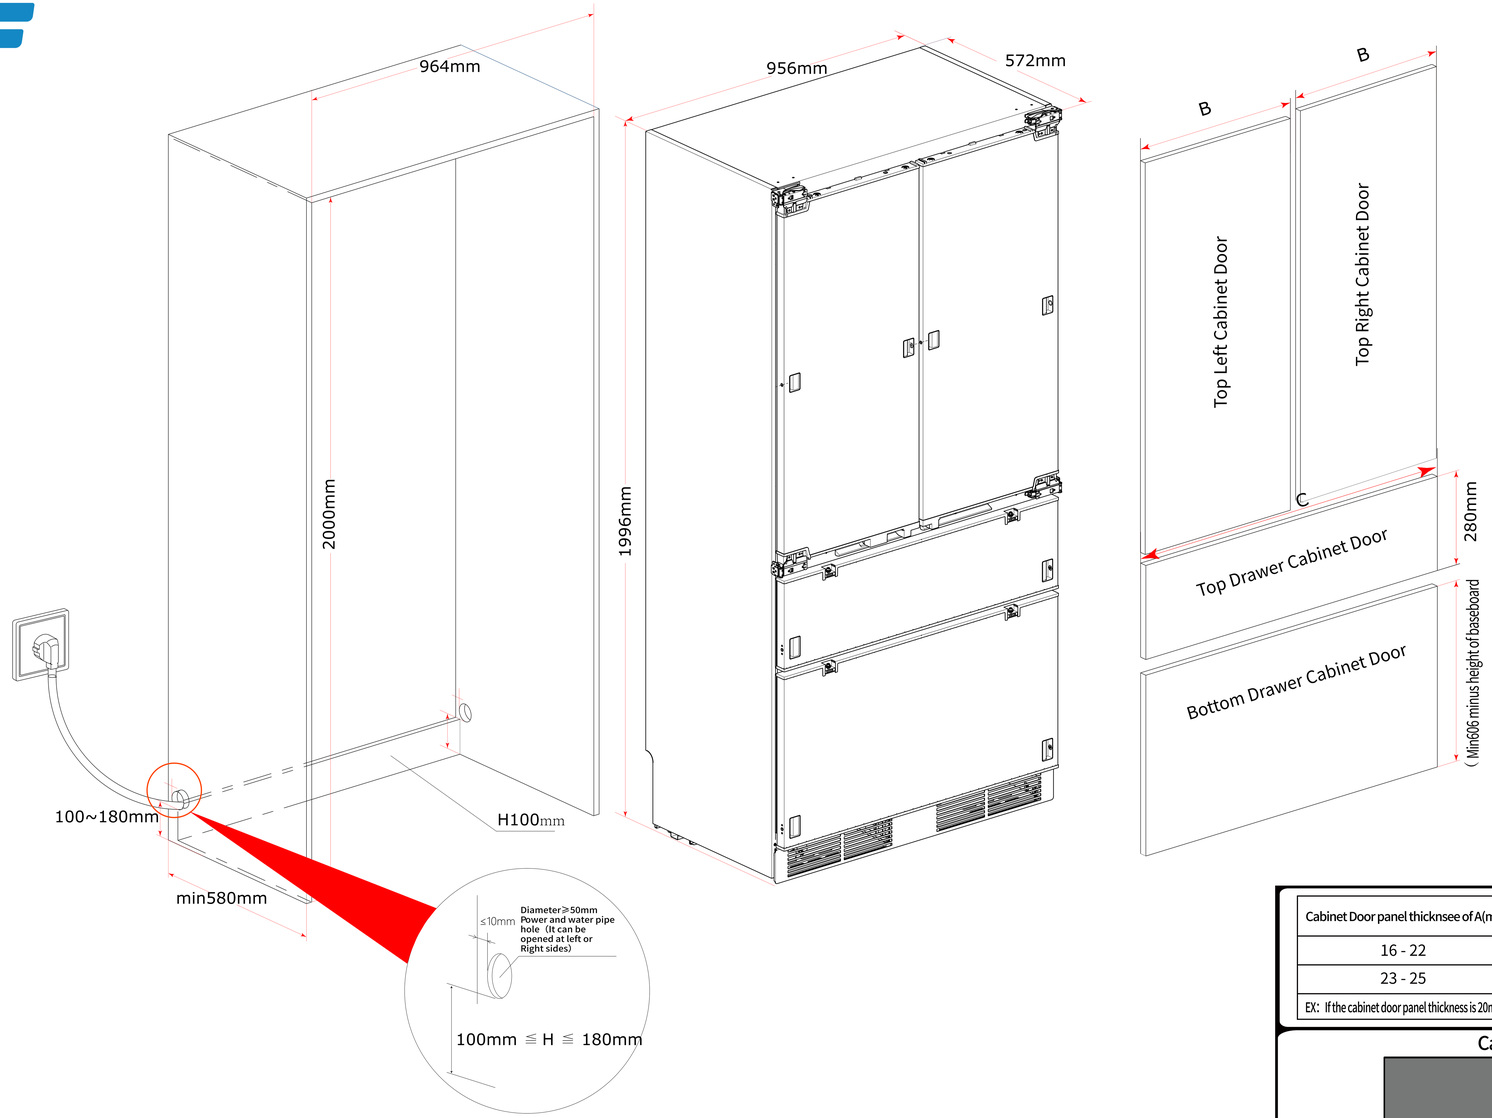

GRF Overlay French Door

Cabinet Door panel thicknsee of A(mm)	Gap X（mm）	Cabinet Door panel widths of B（mm）		Cabinet Door panel widths of C（mm）	
		Case One	Case Two	Case One	Case Two
16 - 22	4	496	494	996	992
23 - 25	4	496（R≥7）	494（R≥9）	996（R≥7）	992（R≥9）

EX：If the cabinet door panel thickness is 20mm,the gap should be 4mm,case one：cabinet door panel widths should be 496mm,C is 996mm;case two:cabinet door panel widths should be 494mm,C is 992mm.

Case One



Case Two



A=Cabinet Door panel thicknsee B=Top Cabinet Door panel widths C=Drawer Cabinet Door panel widths X=Gap R = Cabinet Door filleted corner

Cabinet door panel requirements:

(1) The left cabinet door panel is the same size as the right cabinet door panel, the width is B, and the height is matched according to the cabinet body;
(2) The door panel and the cabinet body are full overlay;
(3) The height of baseboard is between 80-120mm, otherwise the heat dissipation of the refrigerator will be affected;
(4) Power cables and water pipes can be opened on one side or both sides according to the actual situation.
(5) The power socket is in the adjacent cabinet.